


NEW



Mini Chamfer

Optimal for milling, deburring
and back chamfering

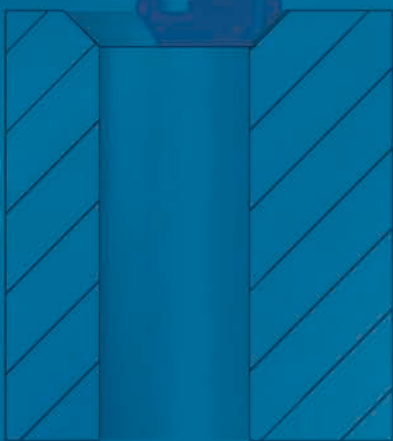


Carmex
Precision Tools Ltd.

Inch

Carbide Grade: MT8

Sub Micron grade with Aluminium Titanium Nitride (AlTiN) multi-layer coating (ISO K10-K20). Extremely high heat resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials.

- Optimal for milling, deburring and back chamfering
- Double side cutting
- Spiral flute allows smooth cutting action

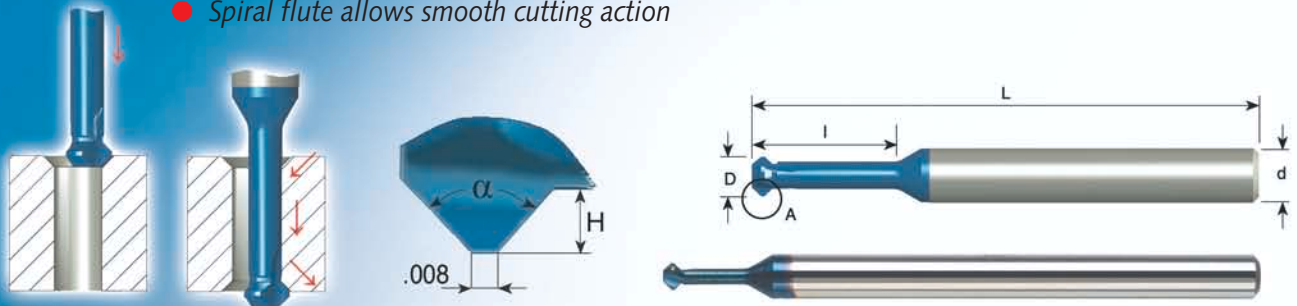

45°

Ordering Code	d mm	D	l	H	α	No. of Flutes	L
MC03015C3 A90	3	.059	.15	.012	90°	3	1.5
MC0302C5 A90	3	.079	.20	.016	90°	3	1.5
MC03025C6 A90	3	.098	.25	.020	90°	3	1.5
MC0303C7 A90	3	.118	.30	.024	90°	3	1.5
MC04035C9 A90	4	.138	.35	.028	90°	3	2.0
MC0404C10 A90	4	.157	.39	.031	90°	3	2.0
MC05045C11 A90	5	.177	.44	.039	90°	3	2.0
MC0505C12 A90	5	.197	.49	.043	90°	3	2.0
MC06055C13 A90	6	.217	.54	.047	90°	3	2.0
MC0606C15 A90	6	.236	.59	.059	90°	3	2.0

Long Reach 45°

Ordering Code	d mm	D	l	H	α	No. of Flutes	L
MC0303C12 A90	3	.118	.47	.024	90°	3	1.5
MC04035C14 A90	4	.138	.55	.028	90°	3	2.0
MC0404C16 A90	4	.157	.63	.031	90°	3	2.0
MC05045C18 A90	5	.177	.71	.039	90°	3	2.0
MC0505C20 A90	5	.197	.79	.043	90°	3	2.0
MC06055C22 A90	6	.217	.87	.047	90°	3	2.3
MC0606C24 A90	6	.236	.94	.059	90°	3	2.3

30°

Ordering Code	d mm	D	l	H	α	No. of Flutes	L
MC0302C5 A60	3	.079	.20	.016	60°	3	1.5
MC0303C7 A60	3	.118	.30	.024	60°	3	1.5
MC04035C9 A60	4	.138	.35	.028	60°	3	2.0
MC0404C10 A60	4	.157	.39	.031	60°	3	2.0
MC05045C11 A60	5	.177	.44	.039	60°	3	2.0
MC0505C12 A60	5	.197	.49	.043	60°	3	2.0